

x = frequency - 915 MHz, 433 MHz, 868 MHz
915 MHz = NORTH AMERICA, LATAM, CARIBBEAN
433 MHz = AFRICA, ASIA, AUSTRALIA, EASTERN EUROPE, BRAZIL, PERU, URUGUAY, NEW ZEALAND
868 MHz = AFRICA, EASTERN EUROPE, WESTERN EUROPE, UK, MIDDLE EAST




Intrusion Detectors

PGx934P Wireless PowerG PIR Motion Detector with Integrated Camera	PGx944 Wireless PowerG Outdoor PIR Motion Detector with Integrated Camera	PGx924 Wireless PowerG Curtain PIR Motion Detector	PGx984P Wireless PowerG Dual Technology (PIR & MW) Motion Detector	PGx974P Wireless PowerG Mirror Optic PIR Motion Detector	PGx994 Wireless PowerG Outdoor PIR Motion Detector	PGx975 Wireless PowerG Door/Window Contact in White or Brown	PGx945 Wireless PowerG Door/Window Contact with Auxiliary Input, in White or Brown	PGx935 Wireless PowerG Shock Detector	PGx922 Wireless PowerG Glass Break Detector
---	--	---	---	---	---	---	---	--	--



Safety Sensors

PGx926 Wireless PowerG Smoke Detector	PGx916 Wireless PowerG Smoke and Heat Detector	PGx913 Wireless PowerG CO Detector	PGx905 Wireless PowerG Temperature Detector	PGx985 Wireless PowerG Flood Detector
--	---	---------------------------------------	--	--



Arming Devices & Panic Buttons

PGx938 Wireless PowerG Panic Key	PGx949 Wireless PowerG 2-Button Key	PGx939 Wireless PowerG 4-Button Key	PGx929 Wireless PowerG 4-Button Key	MPT Mini Prox Tag
-------------------------------------	--	--	--	----------------------



Keypads

HS2LCDWFx / HS2LCDWFPx / HS2LCDWFPVx Wireless Full Message LCD PowerG 2-Way Wire-Free Keypad with optional Prox Support and Voice Prompting	HS2LCD / HS2LCDP Full Message LCD Keypad with optional Prox Tag Support	HS2ICN / HS2ICNP ICON Hardwired Keypad with optional Prox Tag Support	HS2LCDRFx / HS2LCDRFPx Full Message LCD Keypad with Built-in PowerG Transceiver with optional Prox Support	HS2ICNRFx / HS2ICNRFPx ICON Hardwired Keypad with Built-in PowerG Transceiver with optional Prox Support	HS2TCHP Hardwired Touchscreen Keypad 7 inch with Prox Support in Black or White
--	--	--	---	---	--




Sirens, Repeaters & Transceivers

PGx901 Wireless PowerG Indoor Siren	PGx911 Wireless PowerG Outdoor Siren	PGx920 Wireless PowerG Repeater	HSM2HOSTx PowerG Host Transceiver Module
--	---	------------------------------------	---



Communicators & Transmitters

3G8080 / 3G8080(I) HSPA Cellular Alarm Communicator compatible with ALARM.COM*	CD8080 / CD8080(I) CDMA Cellular Alarm Communicator compatible with ALARM.COM*	3G2080E / 3G2080RE HSPA Cellular Alarm Communicator (optional serial connection for integration)	TL2803GE / TL2803GRE Internet and HSPA Dual-path Alarm Communicator (optional serial connection for integration)	T280E / TL280RE Internet Alarm Communicator (optional serial connection for integration)	PCL-422 Communicator Remote Mounting Module
---	---	---	---	---	--



Modules

HSM2300 Power Supply Module	HSM2204 High Current Output Module	HSM2208 Low Current Output Module	HSM2955(R) Two-Way Audio Module	HSM2108 8-Hardwired Zone Expander Module
--------------------------------	---------------------------------------	--------------------------------------	------------------------------------	---




Software Support

WebSA System Administrator Software	Routine System Management Software (RSM)	DLS 5 Downloading Software
-------------------------------------	--	----------------------------

Control Panels


HS2016 / HS2032 / HS2064E / HS2128E 6 to 128 zone control panel
--

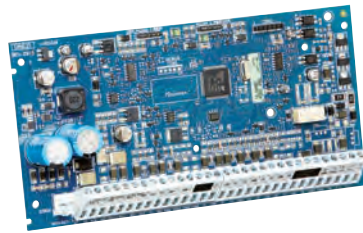

HS2016 6 to 16 Zone

- 6 on-board zones
- Expandable to 16 wireless and hardwired zones
- 2 PGM outputs: expandable to 22 (HSM2204, HSM2208)
- Template programming
- Connect up to 8 supervised keypads with keypad zones
- 2 partitions
- 500-event buffer
- 48 user codes


Available in NA, LATAM, Europe, Africa and APAC

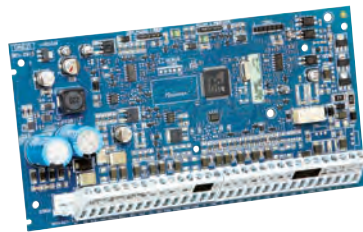

HS2016-4 8 to 32 Zone

- 8 on-board zones
- Expandable to 16 hardwired or 32 wireless zones
- 4 PGM outputs: expandable to 24 (HSM2204, HSM2208)
- Template programming
- Connect up to 8 supervised keypads with keypad zones
- 8 partitions
- 500-event buffer
- 48 user codes


Available in Africa

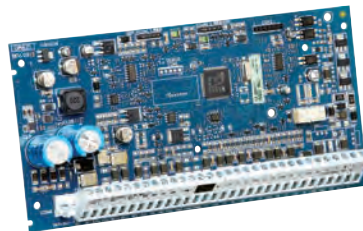

HS2032 8 to 32 Zone

- 8 on-board zones
- Expandable to 32 wireless and hardwired zones
- 2 PGM outputs: expandable to 38 (HSM2204, HSM2208)
- Template programming
- Connect up to 8 supervised keypads with keypad zones
- 4 partitions
- 500-event buffer
- 72 user codes


Available in NA, LATAM, Europe, Africa and APAC

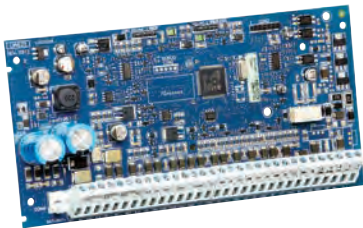

HS2064 8 to 64 Zone

- 8 on-board zones
- Expandable to 64 wireless and/or hardwired zones
- 4 PGM outputs: expandable to 80 (HSM2204, HSM2208)
- Template programming
- Connect up to 8 supervised keypads with keypad zones
- 8 partitions
- 500-event buffer
- 500 user codes

Available in NA, LATAM, Europe, Africa and APAC

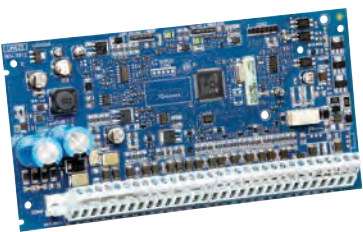

HS2128 8 to 128 Zone

- 8 on-board zones
- Expandable to 128 wireless and/or hardwired zones
- 4 PGM outputs: expandable to 148 (HSM2204, HSM2208)
- Template programming
- Connect up to 16 supervised keypads with keypad zones
- 8 partitions
- 1000-event buffer
- 1000 user codes

Available in NA, LATAM, Europe, Africa and APAC

PowerSeries Neo Feature Comparison Chart

Features	HS2016	HS2016-4	HS2032	HS2064	HS2128
Number of On-Board Zones	6	8	8	8	8
Total Zones Supported	16	32	32	64	128
Keypad Zone Expansion	Yes	Yes	Yes	Yes	Yes
Hardwired Zones	Yes	Yes	Yes	Yes	Yes
Wireless Zone Expansion	Yes	Yes	Yes	Yes	Yes
Number of Hardwired Keypads	8	8	8	8	16
Number of Wireless Keypads	8	8	8	8	16
Number of Wireless Receivers	1	1	1	1	1
Number of Wireless Repeaters	4	4	8	8	8
On-Board PGM Outputs	2	4	2	4	4
Number of Main Panel Low-Current PGM Outputs	1	1	1	1	1
Number of Main Panel High-Current PGM Outputs	1	3	1	3	3
PGM Expansion	Yes	Yes	Yes	Yes	Yes
Number of Additional High-Current PGM Outputs	4	4	4	12	16
Number of Additional Low-Current PGM Outputs	16	16	32	64	128
Number of Access Codes	47 + master	47+ Master	71 + master	499 + master	999 + master
Number of Partitions	2	8	4	8	8
Panel Event Buffer	500	500	500	500	1000
Phone Line Supervision	Yes	Yes	Yes	Yes	Yes
Siren Supervision	Yes	Yes	Yes	Yes	Yes
Bell Output	Yes	Yes	Yes	Yes	Yes
SIA CP-01 Compliant	Yes	No	Yes	Yes	Yes
SMS Command and Control	Yes	Yes	Yes	Yes	Yes
Upload/Download Support	Yes	Yes	Yes	Yes	Yes
Direct-Connect (PC Link) Downloading Support	Yes	Yes	Yes	Yes	Yes
DLS SA End-User Downloading Support	Yes	Yes	Yes	Yes	Yes
Internet Alarm Communications	Yes	Yes	Yes	Yes	Yes
Audio Alarm Verification	with HSM2955(R)	with HSM2955(R)	with HSM2955(R)	with HSM2955(R)	with HSM2955(R)
Cellular Alarm Communications	Yes	Yes	Yes	Yes	Yes
Battery Required	Yes	Yes	Yes	Yes	Yes



HS2LCDWFx Wireless Full Message LCD PowerG 2-Way Wire-Free Keypad

HS2LCDWFPx With Prox Support HS2LCDWFPVx With Prox Support & Voice Prompting

- 2 x16 full message display
- Intuitive clock programming
- Multiple door chime
- Blue display
- White keymat backlight
- Displays outdoor temperature with PGx905
- Voice Prompts
- Installer programming
- Multi-language support
- 5 programmable function keys
- Fire, Medical and Panic keys
- Available with English function keys
- Tamper switch
- Proximity with MPT mini prox tags

Available in NA, LATAM, Europe, Africa and APAC



MPT Mini Prox Tag

Chicklets are small proximity tags for easy arming and disarming of the system. They are ideal for premises with multiple users or infrequent users who may not remember the arm/disarm code.

- 8 different colors
- Keychain strap
- Easily arm and disarm the system
- Compatible with international standards
- Compatible with select control panels and keypads
- Can be placed on a keychain for convenient entry

Available in NA, LATAM, Europe, Africa and APAC



HS2ICN ICON Hardwired Keypad HS2ICNP With Prox Support HS2ICNRFx With Built-in PowerG Transceiver HS2ICNRFpx With Built-in PowerG Transceiver & Prox Support

- Up to 128 hardwired or wireless zones supported
- Modern, slim-line landscape keypad
- White backlit keys
- Blue LCD display
- 5 programmable function keys
- Input/Output terminal
- Fire, Medical and Panic keys
- Adjustable backlight and keypad buzzer
- Available with English function keys
- Proximity with MPT mini prox tags

Available in NA, LATAM, Eastern Europe and APAC

HS2LCD Full Message LCD Hardwired Security Keypad

HS2LCDP Full Message LCD Hardwired Keypad With Prox Support

HS2LCDRFx Full Message LCD Hardwired Keypad With Built-in PowerG Transceiver

HS2LCDRFPx Full Message LCD Hardwired Keypad With Built-in PowerG Transceiver & Prox Support

- Multi-language support
- Global partition status
- Up to 128 hardwired or wireless zones supported
- Full 32-character programmable labels
- Menu programming
- Modern, slim-line landscape keypad
- White backlit keys
- Blue LCD display
- Displays outdoor temperature with PGx905
- 5 programmable function keys
- Intuitive clock programming
- Input/Output terminal
- Fire, medical and panic keys
- Adjustable backlight and keypad buzzer
- Dual wall-mount and front cover tamper
- Available with English function keys
- Proximity with MPT mini prox tags

Available in NA, LATAM, Europe, Africa and APAC



HS2TCHP 7 inch Hardwired TouchScreen Keypad with Prox Support

- Responsive, high-resolution 7" (177.8 mm) full color touchscreen
- Intuitive menu-driven interface for the user
- Configurable home screen
- Built-in and easy-to-update digital picture frame using integrated SD card slot
- Simplified programming of labels using QWERTY keypad
- Clean, low-profile case in either white or black blends into any décor
- Quick-view LED status indicators (Ready, Armed, Trouble and AC Power)
- Interactive Menu ready
- I/O terminal
- SD card GUI Local firmware update
- Prox support (using MPT prox tags)
- Multiple language support

Available in NA, LATAM, Europe, Africa and APAC




PowerSeries Neo Keypad Features	WIRE-FREE		HARDWIRED	
	LCD	LCD	ICON	TouchScreen
Built-in transceiver option		•	•	
Prox option	•	•	•	•
Voice prompt	•			
8 Partition Support	•	•	•	•
Front & rear mount tamper	•	•	•	•
5 Programmable function keys	•	•	•	•
3 Separate panic keys	•	•	•	•
Multiple door chimes	•	•	•	•
I/O onboard		•	•	•



HSM2HOSTx PowerG Host Transceiver Module

- Supports up to 128 wireless zones and 32 wireless keys – varies per panel
- Supports DSC PowerG devices
- Compatible with PGx920 PowerG Repeater for range extension
- All wireless detectors are fully supervised for communication integrity


Available in NA, LATAM, Europe, Africa and APAC



HSM2300 Power Supply Module

- Fully supervised for AC failure, low battery and AUX failure
- Provides up to 1 Amp @ 12 VDC


Available in NA, LATAM, Europe, Africa and APAC



HSM2204 High Current Output Module

- Fully supervised for AC failure, low battery and AUX failure
- 4 programmable high current voltage outputs: rated at 1 Amp @ 12 VDC
- Output #1 can be used as a supervised bell output
- Provides up to 1 Amp @ 12 VDC


Available in NA, LATAM, Europe, Africa and APAC



HSM2208 Output Module

- Provides 8 low current (50 mA) programmable outputs

Available in NA, LATAM, Europe, Africa and APAC



HSM2108 Hard wired zone expander

- Adds 8 hardwired zones
- AUX power up to 125 mA (PTC protected)

Available in NA, LATAM, Europe, Africa and APAC



HSM2955(R) Two-Way Audio Module

- Up to 4 two-way audio stations supported
- Optional recording of up to 15 minutes of pre-alarm activity
- Supports both 2-way audio VOX and push-to-talk verification
- Silent/Listen-in functionality on hold-up alarms (activates only when an alarm occurs)
- Two-way audio over PSTN or Cellular
- Supports PC5961E small and PC5964E large audio stations

Available in NA and EMEA



PCL-422 Communicator Remote Mounting Module

- Allows extension of the PC-LINK connection by 50 ft (15 m) so communicator can be mounted in separate enclosure from panel
- Distance can be extended up to 1000 ft (300 m) if additional power supply is used
- Compatible with 3G2080(E), TL2803G(E) and TL280(E) alarm communicators

Available in NA, LATAM, Europe, Africa and APAC

3G8080(I) / CD8080(I) PowerSeries Neo HSPA / CDMA Cellular Alarm Communicator

- 4 integrated communicator models: 3G8080; 3G8080I*; CD8080**; CD8080I*/**
- 2 integrated cellular technologies: HSPA (3G); CDMA**
- Antenna Extension Kits available: GS-15ANTQ, GS-25ANTQ, GS-50ANTQ
- Signal strength and trouble display
- PC-Link connection
- Compatible with HS2016/ HS2032/ HS2064/ HS2128 control panels
- Compatible with Sur-Gard System I -IP/II/III/IV/5 monitoring station receivers
- Compatible with alarm.com

Available in NA, LATAM, Europe, Africa and APAC

* Required for supporting image sensors ** Only available in US

3G2080(R)E HSPA Cellular Alarm Communicator

- Back up and primary Cellular alarm communication
- Panel remote uploading/downloading support via Cellular
- Supervision heartbeats via Cellular
- 128-bit AES encryption via Cellular
- Full event reporting
- SIA and Contact ID protocol
- Remote activation and programming through C24 Communications (North America Only)
- Signal strength and trouble display
- Visual verification over Cellular
- Communicator can be housed in separate cabinet using PCL-422 Communicator Remote Mounting Module
- Command and Control via SMS
- R model includes RS232 serial integration option
- Provides expanded user support with PowerSeries Neo HS2064 and HS2128 panels V1.2 and higher

Available in NA, LATAM, Europe, Africa and APAC

TL2803G(R)E Internet and HSPA Dual-path Alarm Communicator

- Fully redundant Internet and Cellular dual-path alarm communication
- Integrated call routing
- Panel remote uploading/downloading support via Cellular and Internet
- Supervision heartbeats via Cellular and Internet
- 128-bit AES encryption via Cellular and Internet
- Full event reporting
- SIA and Contact ID protocol
- Remote activating and programming through C24 Communications (North America Only)
- Active Cellular account is required to use IP function
- Signal strength and trouble display
- Visual verification over Cellular or Internet
- Communicator can be housed in separate cabinet using PCL-422 Communicator Remote Mounting Module
- Command and Control via SMS
- R model includes RS232 serial integration option supports up to 4 integration paths over Ethernet
- Provides expanded user support and up to 4 ethernet integrations with PowerSeries Neo panels HS2064 and HS2128 V1.2 and higher


Available in NA, LATAM, Europe, Africa and APAC

T280(R)E Internet Alarm Communicator

- Panel remote uploading/downloading via Internet
- Programmable using DLS 5 or keypad
- Supervision heartbeat via Internet
- 128 Bit AES Encryption
- Full event reporting
- SIA and Contact ID protocol
- Visual verification over Internet
- Communicator can be housed in separate cabinet using PCL-422 Communicator Remote Mounting Module
- R model includes RS232 serial integration option
- Provides expanded user support (HS2064/ HS2128) and up to 4 ethernet integrations with PowerSeries Neo panels V1.2 and higher
- Refer to www.dsc.com for complete list of integration options

Available in NA, LATAM, Europe, Africa and APAC

Some products are not available in all countries. Please contact your local distributor or refer to www.dsc.com for the most current approval listings.





PGx975 Wireless PowerG Door/Window Contact

- Wafer-thin profile
- Visible link quality indicator on device
- Fully supervised
- Includes double-sided tape
- Large transmission range enabling repeater-free installations
- Easy to install and remove
- Prolonged battery life (5 years with typical use)
- Dimensions: 62 x 25.4 x 7.7mm (2.45 x 1 x 0.3in)
- Available in White or Brown plastic

Available in NA, LATAM, Europe, Africa and APAC



PGx945 Wireless PowerG Door/Window Contact with Auxiliary Input

- Selectable operation of auxiliary input as NO, NC or EOL supervision
- Visible link quality indicator shown on device
- Case and wall tamper
- Ideal for protecting doors, windows and other openings
- Prolonged battery life (8 years with typical use)
- Back tamper switch included on PG4945 and PG8945
- Dimensions: 81 x 32 x 25mm (3.19 x 1.25 x 1in)
- Available in White or Brown plastic

Available in NA, LATAM, Europe, Africa and APAC



PGx904P Wireless PowerG PIR Motion Detector

- Visible link quality indicator on device
- 49 ft (15 m) 90° coverage
- True Motion Recognition™ to distinguish between motion of an intruder and any other disturbances which may cause false alarms
- Pet immunity up to 85 lbs (38 kg)
- Prolonged battery life (6 years with typical use)
- Large transmission range enabling repeater-free installations
- Dimensions: 94.5 x 63.5 x 53mm (3.7 x 63.5 x 2.06in)

Available in NA, LATAM, Europe, Africa and APAC

PGx934P Wireless PowerG PIR Motion Detector with Integrated Camera

- Visual alarm verification day & night
- Full color, high-resolution images transmitted from the premises via Cellular or Ethernet
- CMOS camera with IR illumination
- Auto-setup for brightness and contrast via the control panel
- Front cover and back tamper
- Pet immune up to 85 lbs (38 kg)
- Prolonged battery life (3 years with typical use)
- Dimensions: 125 x 63 x 60mm (4.9 x 2.5 x 2.4in)

Available in NA, LATAM, Europe, Africa and APAC



PGx924 Wireless PowerG Curtain PIR Motion Detector

- Visible link quality indicator on device
- Ideal for protection of doors and windows
- Selectable curtain coverage 6, 12, 18 ft (2, 4, 6 m)
- Front cover and back tamper
- Prolonged battery life (7 years with typical use)

Available in NA, LATAM, Europe, Africa and APAC



PGx984P Wireless PowerG Dual Technology (PIR & MW) Motion Detector

- Visible link quality indicator on device
- Vandal-resistant design
- Dual Technology PIR and K-Band Microwave frequency to reduce false alarms
- Prolonged battery life (5 years with typical use)
- Dimensions: 115 x 60 x 48mm (4.5 x 2.3 x 1.9in)

Available in NA, LATAM, Europe, Africa and APAC





PGx974P Wireless PowerG Mirror Optic PIR Motion Detector

- Coverage area – 50 ft (15 m), 90°
- Mirror optics offer exceptionally high detection sensitivity and immunity to false alarms
- Vandal-resistant design (small, recessed and robust slot window)
- Easy to install - no vertical adjustment needed
- Front and back tamper
- Prolonged battery life (7 years with typical use)
- Dimensions: 115 x 60 x 48mm (4.5 x 2.3 x 1.9in)

Available in NA, LATAM, Europe, Africa and APAC



PGx994 Wireless PowerG Outdoor PIR Motion Detector

- Visible link quality indicator on device
- Minimizes false alarms while ensuring effective detection of real threats
- Octa-Quad Technology
- Vandal-resistant design
- Black mirror optics for exceptionally high immunity to false alarms
- Prolonged battery life (3 years with typical use)
- Unprecedented, complete anti-masking protection

Available in NA, LATAM, Europe, Africa and APAC



PGx944 Outdoor PIR Motion Detector with Integrated Camera

- Innovative Octa-Quad technology to minimize false alarms
- Visual verification with image capture
- Camera range in parallel to PIR coverage - no lost areas
- Robust housing and patented anti-masking protection
- Market-leading black mirror optics
- Built in RF-link status LED
- Remote maintenance with configuration and testing via keypad
- Prolonged battery life (3 years with typical use)

Available in NA, LATAM, Europe, Africa and APAC



PGx922 Wireless PowerG Glass Break Detector

- Glass break detection of plate, tempered, laminated and wired glass
- Detection range up to 20 ft (6 m)
- Visible link quality indication shown on the device
- Acoustic Pattern Recognition Technology provides 360° coverage
- Prolonged battery life (5 years with typical use)
- Visible and transmitted low battery indication

Available in NA, LATAM

PGx938 Wireless PowerG Panic Key

- Activation via large, easy-to-use button
- Integrated LED to indicate signal transmission and acknowledgment
- Water resistant
- Multifunction clip and neck strap
- Full 2-second delay on panic button
- Fully supervised
- Dimensions: 53 x 33 x 11mm (2.1 x 1.3 x 0.43in)
- Prolonged battery life (7 years with typical use)

Available in NA, LATAM, Europe, Africa and APAC



PGx949 Wireless PowerG 2-Button Key

- Activation via 2 large, easy to use buttons
- Integrated LED to indicate signal transmission and acknowledgment
- Built-in buzzer for audible indication
- Water resistant
- Multifunction clip and neck strap
- Full 3-second delay on panic button to reduce false alarms
- Prolonged battery life (7 years with typical use)
- Supplied with a belt clip, a key chain, and a lanyard necklace
- Dimensions: 53 x 33 x 11mm (2.1 x 1.3 x 0.43in)

Available in NA, LATAM, Europe, Africa and APAC



PGx939 Wireless PowerG 4-Button Key

- 4 programmable function keys
- Visual and audible indicator to acknowledge requested action
- Full 3-second delay on panic function to reduce false alarms
- Prolonged battery life (8 years with typical use)

Available in NA, LATAM, Europe, Africa and APAC



PGx929 Wireless PowerG 4-Button Key

- 4 programmable function keys
- Visual and audible indicator to acknowledge requested action
- Full 3-second delay on panic function to reduce false alarms
- Visible signal quality indication shown on the device
- Prolonged battery life (5 years with typical use)
- Dimensions: 60 x 34.5 x 12.5mm (2.3 x 1.3 x 0.5in)

Available in NA, LATAM, Europe, Africa and APAC





PGx935 Wireless PowerG Shock Detector

- Visible link quality indicator on the device
- High immunity to background vibrations
- Adjustable shock/vibration thresholds
- Front and back tamper
- Optional magnetic reed switch contact
- Early detection of forceful attacks or low-level shocks
- Protects windows, doors, walls and roofs against forced entry
- Quick and easy installation using unique 7-segment shock meter and push buttons
- Prolonged battery life (5 years with typical use) with all sensors enabled

Available in NA, LATAM, Europe, Africa and APAC



PGx926 Wireless PowerG Smoke Detector

- Photoelectric smoke detector
- Provides alerts for smoke, tamper and device low battery
- Visible link quality indication shown on the device
- Fully supervised
- Maintenance and battery condition indication
- Built in 85db alarm buzzer
- Prolonged battery life (8 years with typical use)

Available in NA, LATAM, Europe, Africa and APAC



PGx916 Wireless PowerG Smoke and Heat Detector

- Photoelectric smoke detector with built-in heat sensor
- Provides alerts for smoke, tamper and device low battery
- Visible link quality indication shown on the device
- Fully supervised
- Maintenance and battery condition indication
- Built in 85db alarm buzzer
- Certified by the most strict and demanding international standards
- Prolonged battery life (8 years with typical use)

Available in NA, LATAM, Europe, Africa and APAC

PGx913 Wireless PowerG CO Detector

- Early warning of carbon monoxide (CO) poisoning danger
- Visual and audible alarm indications upon CO detection
- Built-in 95db alarm buzzer and large flashing LED alarm
- Visible and transmitted low battery indication
- Fully certified by the most strict and demanding international standards for safety products in Europe (LPCB UK, EN 50291) and USA (UL 2075)
- Auto-test and manual test buttons included
- Long battery life (4 years with typical use)

Available in US, LATAM, Europe, Africa and APAC



PGx905 Wireless PowerG Temperature Detector

- Visible link quality indication shown on the device
- Programmable temperature warning and alarm thresholds
- Optional probe to monitor refrigerator, freezer and outdoor temperatures
- Front and back tamper protected
- Prolonged battery life (7 years with typical use)
- Dimensions: 81 x 32 x 25mm (3.19 x 1.25 x 1in)
- External temperature probe PGTEMP-PROBE

Available in NA, LATAM, Europe, Africa and APAC



PGx985 Wireless PowerG Flood Detector

- Visible signal quality shown on the device
- Fully supervised
- 6 ft (2 m) wire water probe
- Visible and transmitted low battery indication
- Prolonged battery life (8 years with typical use)
- Dimensions: 81 x 34 x 25mm (3.19 x 1.25 x 1in)

Available in NA, LATAM, Europe, Africa and APAC

